



# ASSEMBLY AND INSTALLATION INSTRUCTIONS

H0194

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. READ AND SAVE THESE INSTRUCTIONS.

## Hardware Package (included):

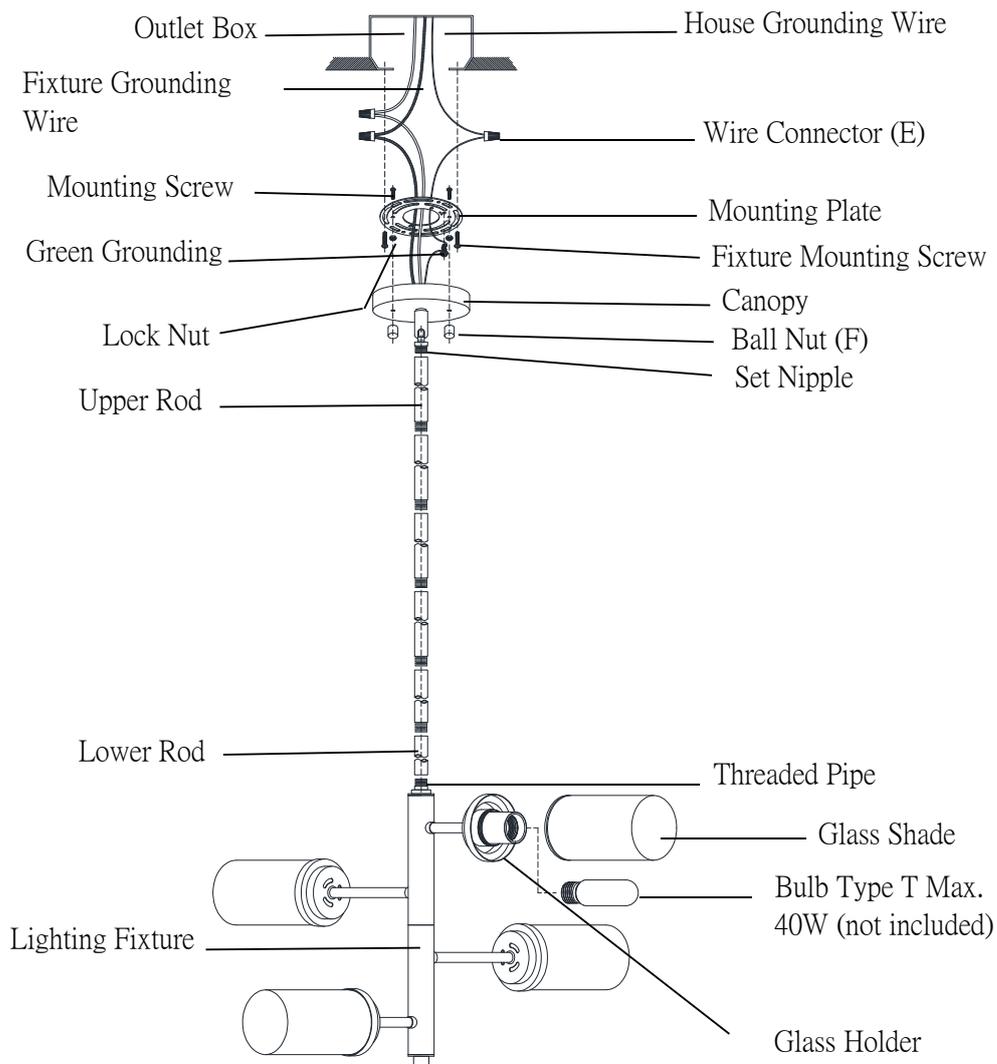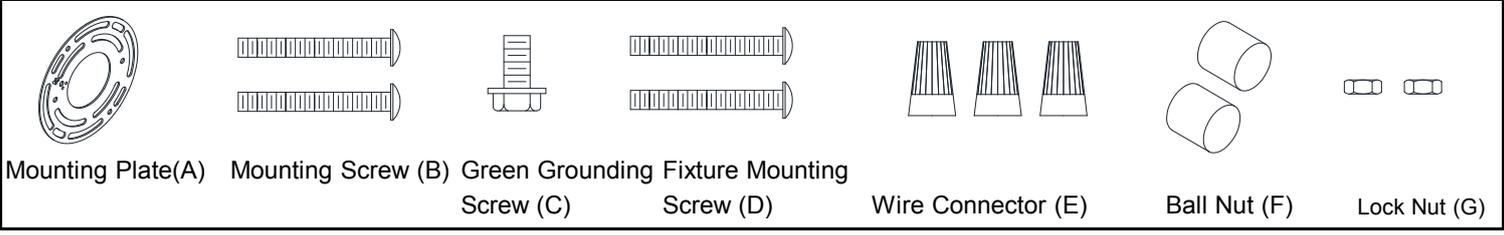

## Installation Steps

**Turn off the power at fuse or circuit box**

1. Secure rods into the threaded pipe of the light.
2. Attach two fixture mounting screws to the mounting plate, and then secure it with two lock nuts. Adjust the length of the fixture mounting screws if necessary.
3. Attach the mounting plate to the outlet box using two mounting screws.



4. Rod Connections:

- a. Thread the fixture wires from the fixture through the lower rod, and then secure the lower rod onto fixture using the threaded pipe.
- b. Thread the fixture wires through the middle rod, and then secure the middle rod onto the lower rod using the threaded pipe.
- c. Thread the fixture wires through the upper rod, and then secure the upper rod onto the middle rod using the threaded pipe.

d. Thread the fixture wires through the fixture canopy, and then secure fixture canopy onto the upper rod using the threaded pipe.

Note: Height adjustable from 19-1/8" to 73-1/8".

Use fewer rods if shorter length is desired.

5. Adjust the lighting fixture into the same angle as the drawing.

6. Pull out the source wires from the outlet box. Make wire connections using wire connectors as follows:


- Connect the smooth-coated wire (marked) from the fixture to the black wire from the power source.
  - Connect the ribbed-coated wire (unmarked) from the fixture to the white wire from the power source.
  - Attach the fixture grounding wire to the mounting strap with the green grounding screw, and then connect it to the house grounding wire with a wire connector.
- Carefully put the wires back into the outlet box.

7. Attach the fixture canopy to the mounting plate by inserting the fixture mounting screws, and then secure it with two ball nuts.

8. Install 4\*40W Max Candelabra Base Bulbs (not included). Check relamping label at socket area or packaging for maximum allowed wattage.

9. Attach the glass shade to the glass holder tightly.


10. Angled mounting recommended for a vaulted or angled ceiling. (See Fig. 1)

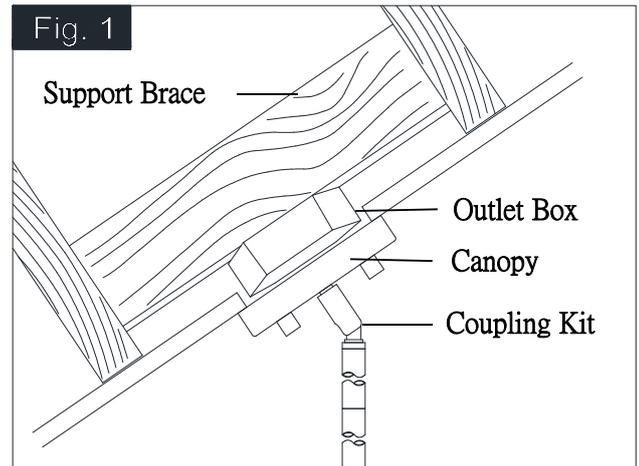

**Turn on the power at fuse or circuit box**

The following parts are available for re-order if damaged or missing  
**Spare Parts List:**

Mounting Plate(A)	Mounting Screw (B)	Green Grounding Screw (C)	Fixture Mounting Screw (D)
Wire Connector (E)	Ball Nut (F)	Lock Nut (G)	
<p style="margin: 0;">↑</p> <p style="margin: 0;"><b>Assembly Kit 5780MM (1 SET)</b></p>			
3103RD (4PCS)	3104RD (1PC)	3105RD (1PC)	
Glass Shade	9928CE (4PCS)		

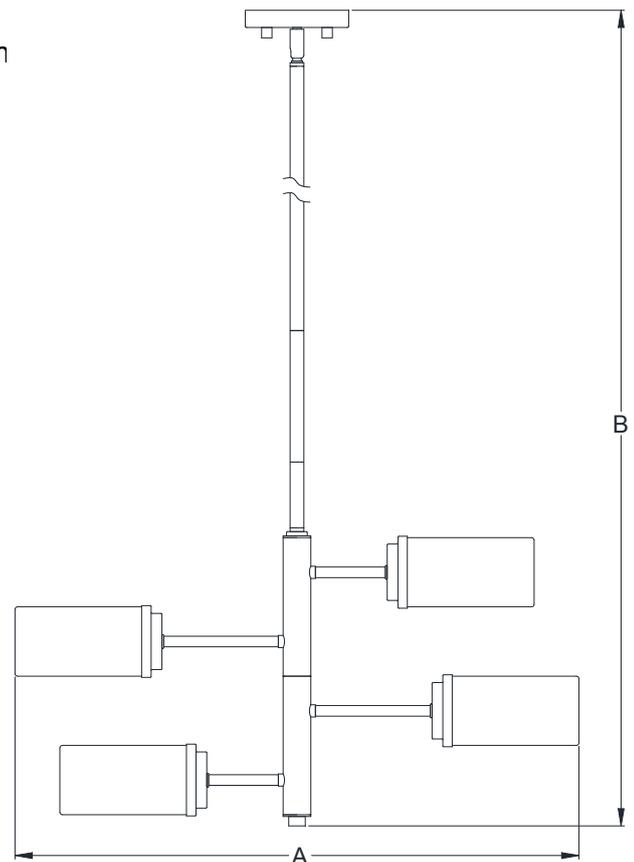

**A: 25-3/4"**  
**B: 19-1/8"~73-1/8"**



20171130