


ASSEMBLY AND INSTALLATION INSTRUCTIONS

P0236

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THIS INSTRUCTION.

Hardware Package (included):

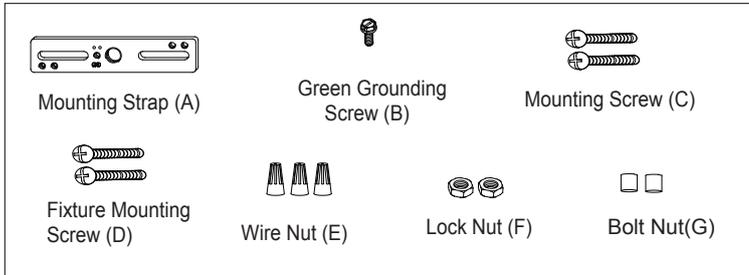

Installation Steps

Turn off the power at fuse or circuit box.

1. Rod Connections:

- Thread the fixture wire from the fixture through the lower rod, then secure the lower rod onto fixture using the threaded pipe.
- Thread the fixture wire through the middle rod, and then secure the middle rod onto the lower rod using the threaded pipe.
- Thread the fixture wire through the upper rod, and then secure the upper rod onto the middle rod using the threaded pipe.


Note: Length adjustable from 17-3/4" to 65-3/4". Use fewer rods if shorter length is desired.

- Thread the fixture wire through the canopy kit, then secure the rod assembly to the set nipple of the canopy kit.
- Attach the mounting strap to outlet box by using two mounting screws.
- Pull out the source wires from the outlet box. Make wire connections using wire nuts as follows:
 - Connect the smooth-coated wire (marked) from the fixture to the black wire from the power source.
 - Connect the ribbed-coated wire (unmarked) from the fixture to the white wire from the power source.
 - Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with a wire nut.

Carefully put the wires back into the outlet box.

- Attach the canopy kit to the mounting strap by inserting the fixture mounting screws, then secure it with two bolt nuts.
- Attach the glass shade to fixture, then secure it with the socket ring.
- Install bulb (not included). See relamping label at socket area or packaging for maximum allowed wattage.
- Angled mounting recommended for a vaulted or angled ceiling. (See Fig. 1)


Turn on the power at fuse or circuit box.

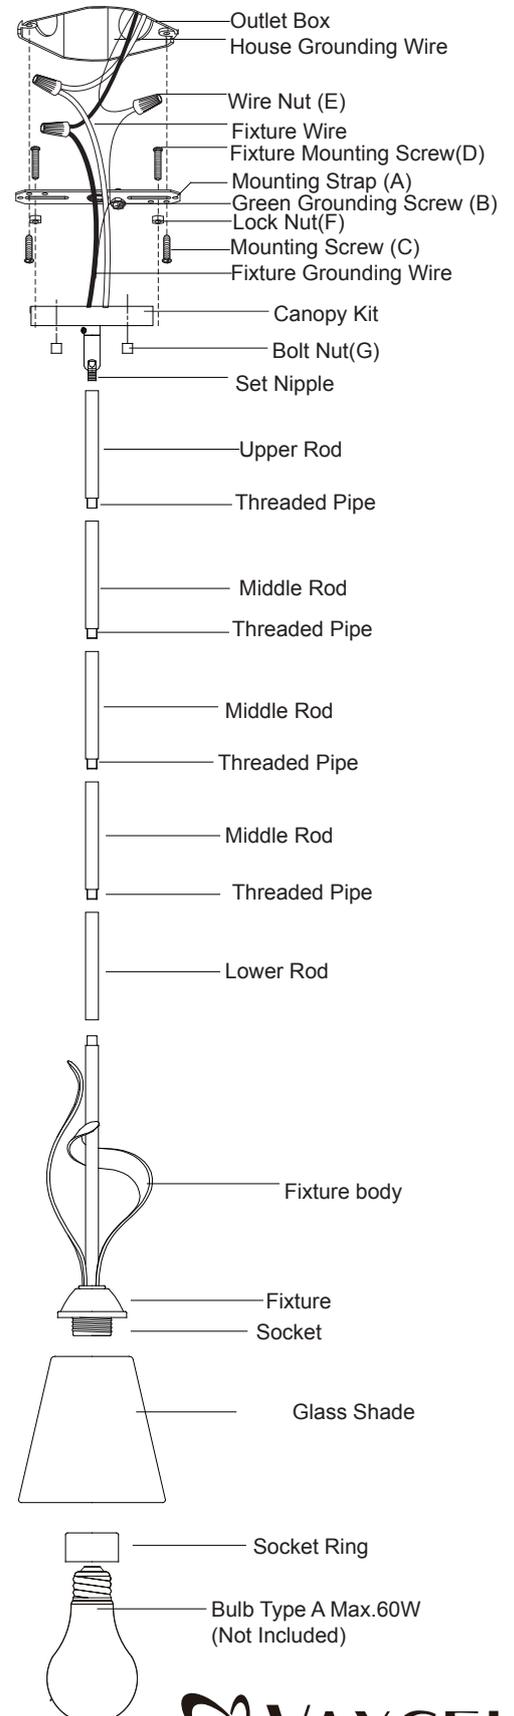

VAXCEL

171030


Fig. 1

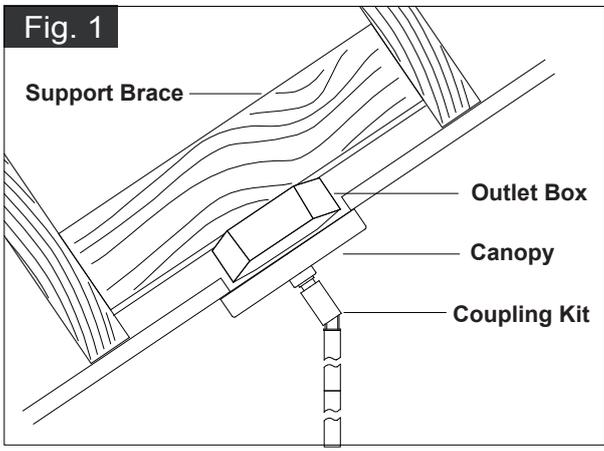

The following parts are available for re-order if damaged or missing.

Spare Parts List:

 Mounting Strap (A)	 Green Grounding Screw (B)	 Mounting Screw (C)	→ Mounting Hardware 5216MM (1 SET)
 Fixture Mounting Screw (D)	 Wire Nut (E)	 Lock Nut (F)	
 12"Rod 3011RD (3PC)	 6"Rod 3012RD(1PCS)	 3"Rod 3013RD (1PCS)	 Glass Shade 9913CS(1PCS)

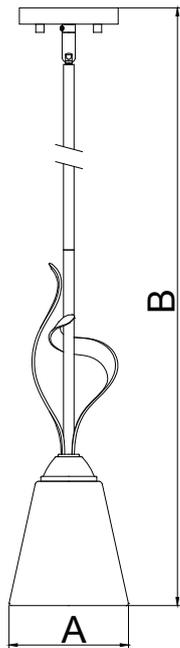

A: 5-3/4"

B: 17-3/4"~65-3/4"